endox®
Feinwerktechnik GmbH

Hypotube

Ø-tw -x-l / Hypotube with stiletto (lasered)

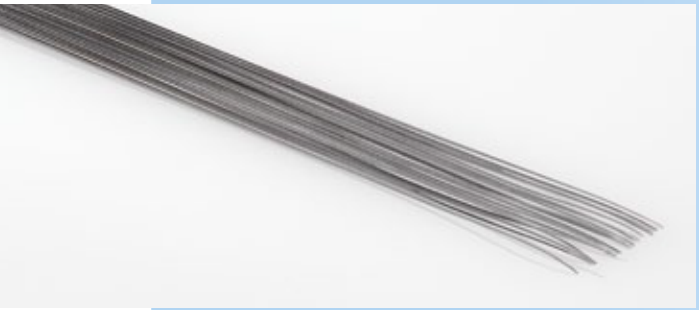

Ø-tw -x-l / Hypotube with skive

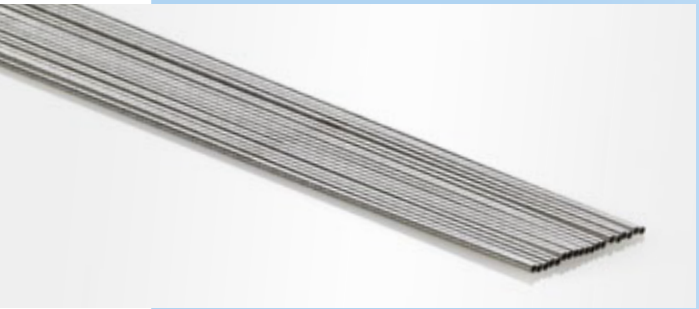

Ø-tw -x-l / Hypotube (laser cutting)

Explanations

Ø	diameter of the tube (standard 0.3 - 2.0; others on request)
tw	wall thickness in mm (from 0.05)
x	coatings
	U uncoated
	P PTFE
	H hydrophil
l	lengths (individually on request)

Material: stainless steel 1.4301
Coating: individually on request
Tolerances: depends on the length
+/- 0.2 mm bis +/- 1.0 mm

The different possibilities of processing are:
- sandblasted
- slotted
- welded (laser or microplasma)
- ground
- laser cutting
- others on request

Customer requirements
Besides our standards, we would be pleased to be your manufacturer when it comes to individual specifications and wishes for Hypotubes.